




JSH-2240A


- Rating : DC48V 0.1A
- Circuit : 2C-2P
- Contact resistance : 50mΩmax
- Timing : shorting or non-shorting
- Operating force : 70gf Max
- Life : 300,000Cycles

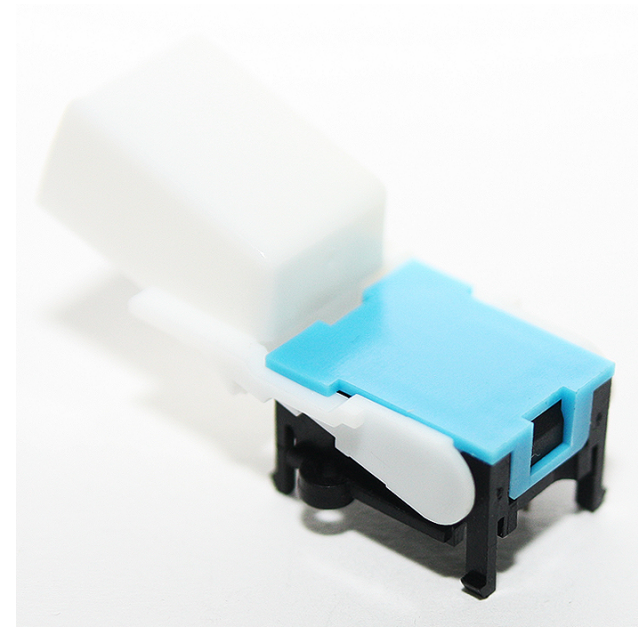

Lead Free

RoHS Compliant

OUTLINE DRAWING


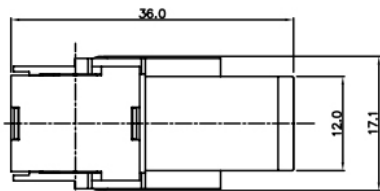


TIME LAG DIAGRAM (NON-SHORTING)

① ③	ON	OFF
② ③	OFF	ON
④ ⑥	ON	OFF
⑤ ⑥	OFF	ON


17.65 max. 11.0 min. (mm)

TRAVEL POSITION(X)

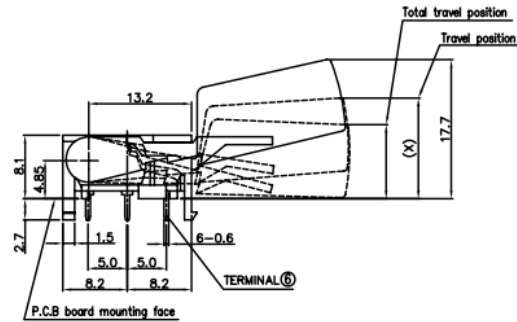

PACKING
BULKTYPE
500/1BAG(EA)

CIRCUIT DIAGRAM



P.C.B MOUNTING HOLES

