




JSP-2213A

- Rating : DC30V 0.1A
- Circuit : 2C-2P
- Contact resistance : 70mΩ MAX
- Timing : shorting or non-shorting
- Operating mode : Self-lock, non-lock, non-lock with click
- Stroke : Full-2.50mm, Lock-1.50mm
- Operating force : 200±80gf, 300±100gf
- Life : 10,000Cycles

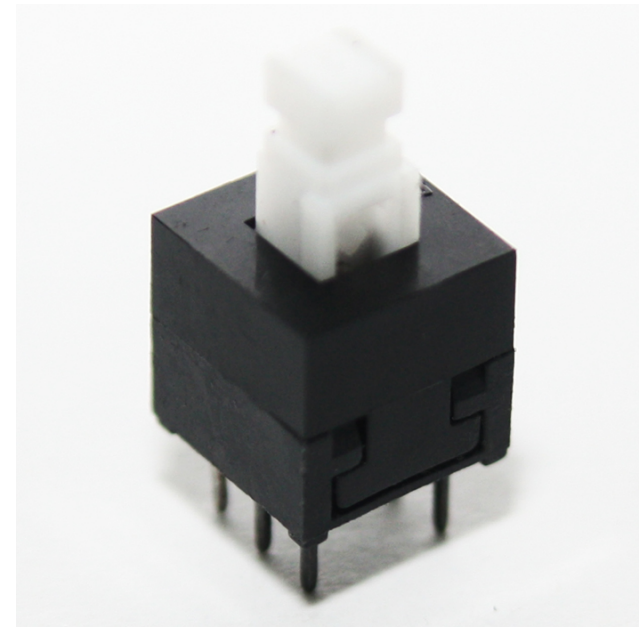

Lead Free

RoHS Compliant

OUTLINE DRAWING

