




JSP-2216F

- Rating : DC30V 0.1A
- Circuit : 2C-2P
- Contact resistance : 70mΩ MAX
- Timing : shorting or non-shortng
- Operating mode : Self-lock, non-lock
- Stroke : Full-1.9mm, Lock-1.0mm
- Operating force : 180±80gf, 250±80gf
- Life : 10,000Cycles

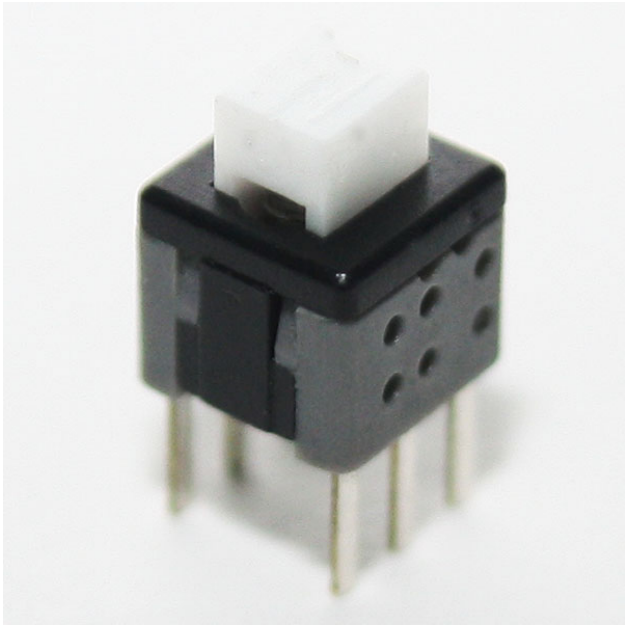

Lead Free

RoHS Compliant

OUTLINE DRAWING

