




JSP-2217


- Rating : DC30V 0.1A
- Circuit : 2C-2P
- Contact resistance : 70mΩ MAX
- Timing : shorting or non-shorting
- Operating mode : Self-lock, non-lock
- Stroke : Full-1.8mm, Lock-1.2mm
- Operating force : 200±80gf
- Life : 10,000Cycles

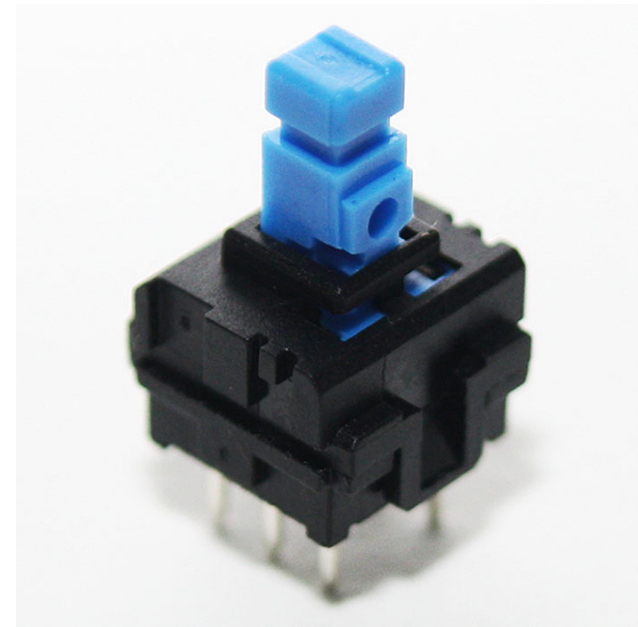



Lead Free

RoHS Compliant

OUTLINE DRAWING



Model No.	
JSP2217S	SELF LOCK
JSP2217N	NON LOCK



PACKING
BULKTYPE
500/1BAG(EA)

