




JSP-4283

- Rating : DC30V 0.1A
- Circuit : 4C-2P
- Contact resistance : 70mΩmax
- Timing : shorting or non-shorting
- Operating mode : Self-lock, non-lock
- Stroke : Full-2.5mm, Lock-1.5mm
- Operating force : 200±80gf, 300±100gf
- Life : 10,000Cycles

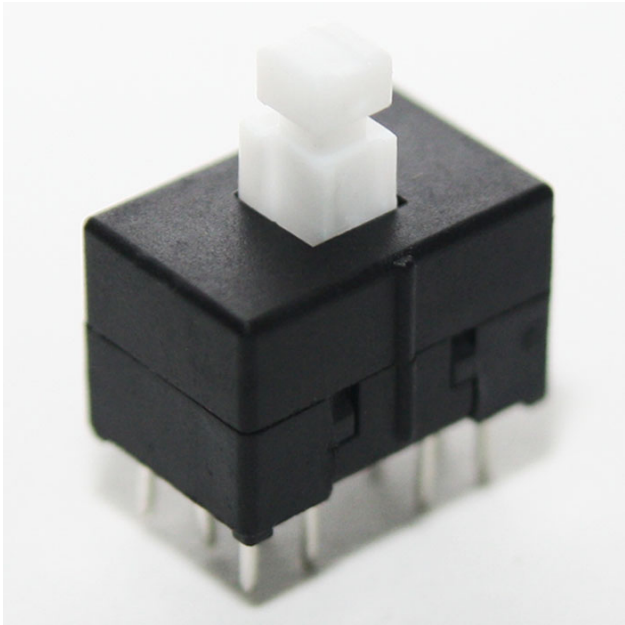

Lead Free

RoHS Compliant

OUTLINE DRAWING

