





JSS-1400

- Rating : DC4V 0.3A
- Circuit : 2C-3P
- Contact resistance : 70mΩ MAX
- Timing : non-shorting
- Travel : 1.5+1.5±0.1mm
- Operating force : a-b, b-a, b-c, c-b } 200±150gf
- Operating life : 10,000Cycles

Model No.	H (mm)
1400A	1.0
1400B	2.5


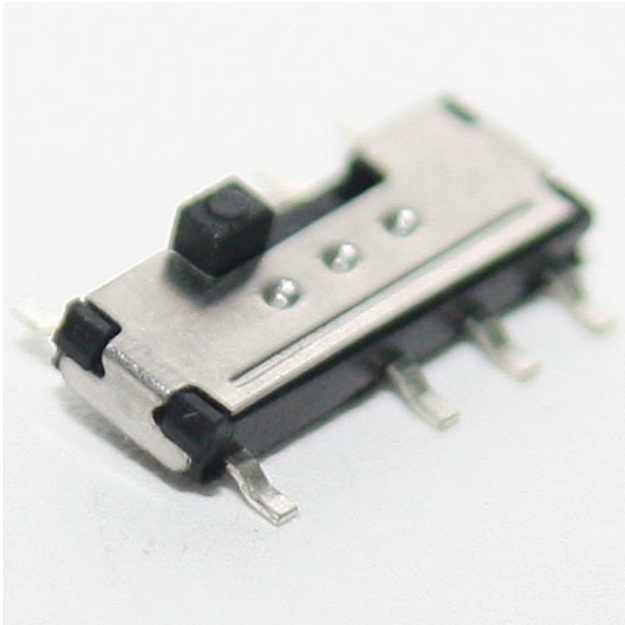


● OUTLINE DRAWING



KNOB HEIGHT

MODEL	H(mm)
JSS1400A	1.0
JSS1400B	2.5



PACKING

REELTYPE

1400A : 1500/1REEL(EA)

1400B : 1200/1REEL(EA)

CIRCUIT DIAGRAM

P.C.B LAND PATTERN

