




JSS-2235


- Rating : DC6V 0.3A
- Circuit : 2C-2P
- Contact resistance : 70mΩ MAX
- Timing : non-shorting
- Travel : 2.0±0.1mm
- Operating force : 200±100gf
- Operating life : 10,000Cycles

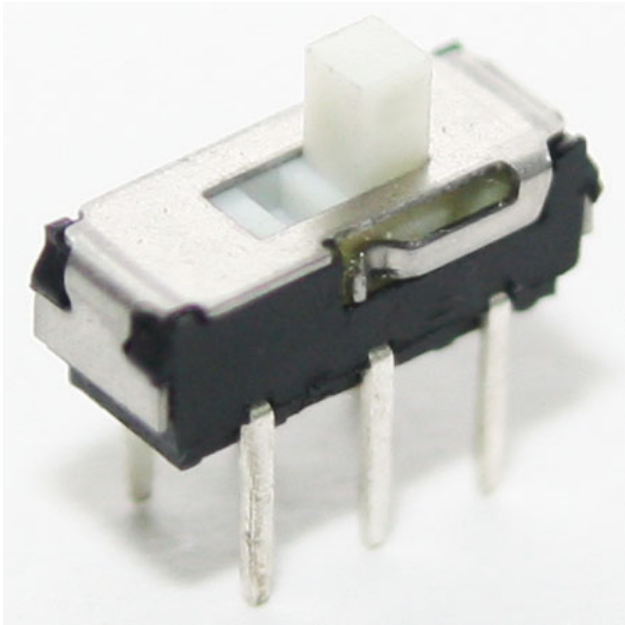

Lead Free



RoHS Compliant

OUTLINE DRAWING




KNOB HEIGHT

MODEL	H (mm)	H1 (mm)
JSS2235A	2.0	8.5
JSS2235B	4.0	10.5

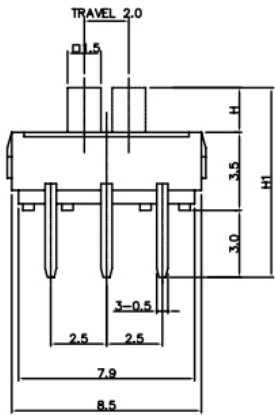

PACKING
BULKTYPE
1000/1BAG(EA)

CIRCUIT DIAGRAM



P.C.B LAND PATTERN

