



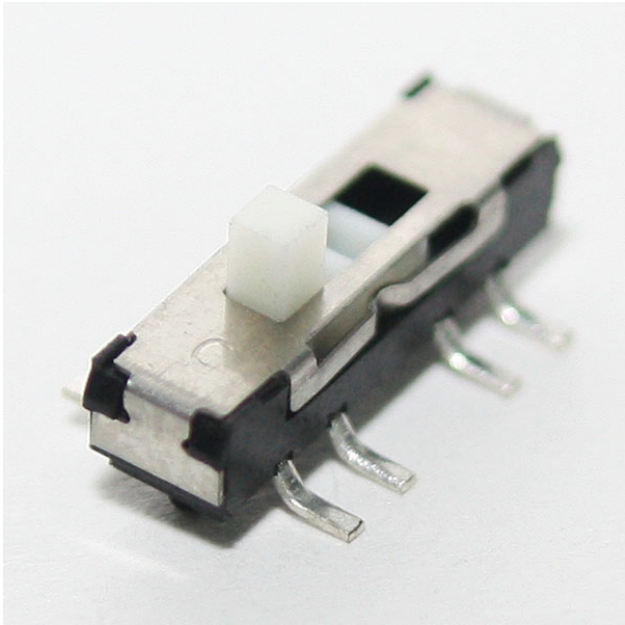


JSS-2336S

- Rating : DC6V 0.3A
- Circuit : 2C-3P
- Contact resistance : 70mΩ MAX
- Timing : non-shorting
- Travel : 2.0+2.0mm
- Operating force : A → B ← C : 250±100gf
A ← B → C : 300±150gf
- Operating life : 10,000Cycles





Model No.	H (mm)	H1 (mm)
2236SA	2.0	8.5
2236SB	4.0	7.5

● OUTLINE DRAWING



Knob Height

MODEL	H(mm)	H1(mm)
JSS2336SA	2.0	5.5
JSS2336SB	4.0	7.5



Packing

Reeltype

2336SA : 1000/1REEL(EA)

Bulktype

2336SB : 1000/1BAG(EA)

Circuit Diagram

P.C.B Land Pattern