


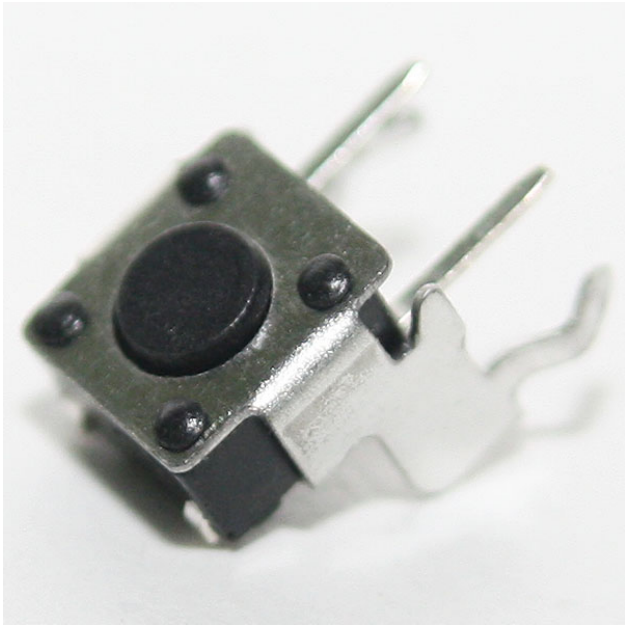


JST-1102H

- Rating : DC12V 50mA
- Contact resistance : 100mΩ MAX
- Travel : 0.25+0.1mm
- Bounce : 10m Sec Max

Model No.	Operating force	Life cycles	
1102H-0, 0S	100±30gf	80,000	1,000,000
1102H-1, 1S	130±30gf	80,000	1,000,000
1102H-2, 2S	160±50gf	80,000	1,000,000
1102H-3, 3S	250±50gf	50,000	300,000
1102H-4, 4S	350±80gf	50,000	200,000
1102H-5, 5S	500±100gf	30,000	100,000

● OUTLINE DRAWING

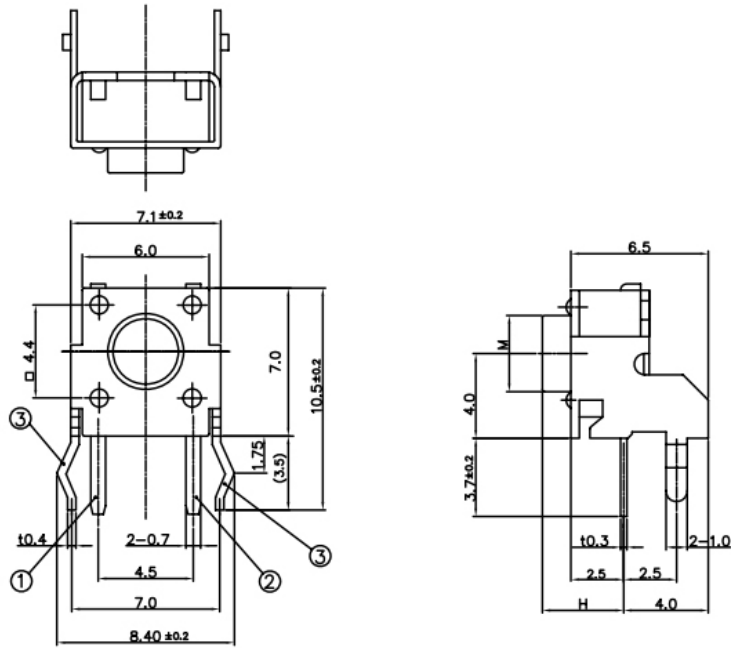

CIRCUIT DIAGRAM

P.C.B MOUNTING HOLES

