


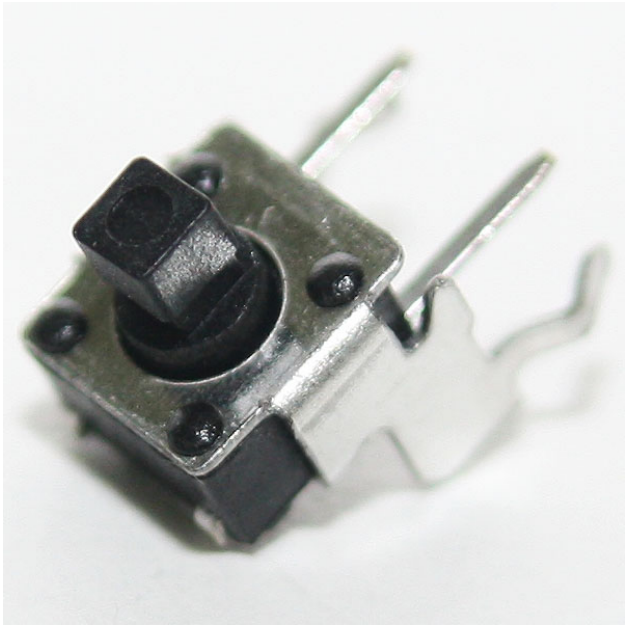


JST-1102HT

- Rating : DC12V 50mA
- Contact resistance : 100mΩ MAX
- Travel : 0.25+0.1mm
- Bounce : 10m Sec Max


Model No.	Operating force	Life cycles	
1102HT-0, 0S	100±30gf	80,000	1,000,000
1102HT-1, 1S	130±30gf	80,000	1,000,000
1102HT-2, 2S	160±50gf	80,000	1,000,000
1102HT-3, 3S	250±50gf	50,000	300,000
1102HT-4, 4S	350±80gf	50,000	200,000
1102HT-5, 5S	500±100gf	30,000	100,000

● OUTLINE DRAWING

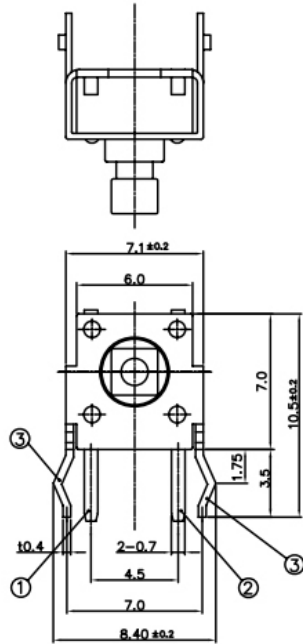

STEM SIZE

MODEL	M (mm)
JST1102HT	□2.4
JST1102HTA	□2.8

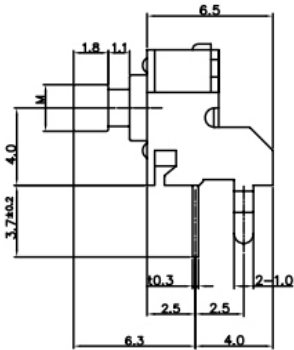

CIRCUIT DIAGRAM

P.C.B MOUNTING HOLES

