




JST-1102L


- Rating : DC12V 50mA
- Travel : 0.25±0.1mm
- Operation Force : 100, 130, 160, 250±50gf
- Contact Resistance : 100mΩMax.
- Life : 80,000 Cycles Min.

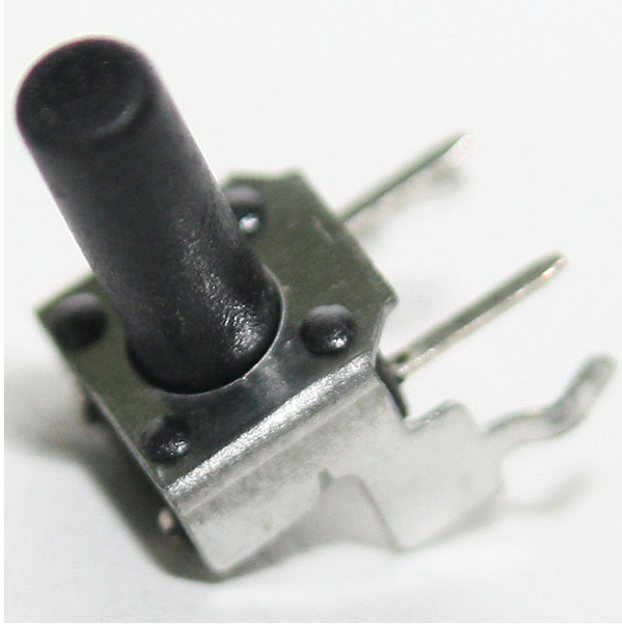

Lead Free

RoHS Compliant

● OUTLINE DRAWING

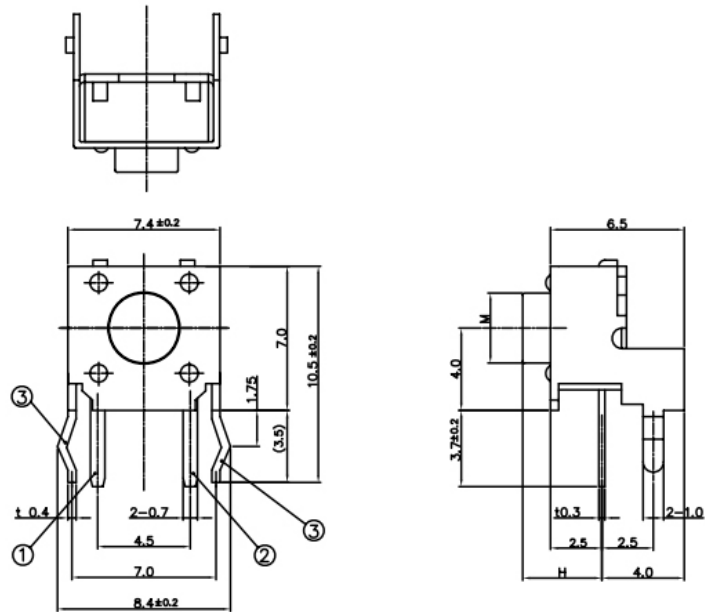

CIRCUIT DIAGRAM	P.C.B MOUNTING HOLES
① ——— ② ③ ——— GND	2-φ1.3^{+0.1}₋₀ HOLES 2-φ1.0^{+0.1}₋₀ HOLES