




JST-1109

- Rating : DC12V 50mA
- Travel : 0.25±0.1mm
- Contact Resistance : 100mΩMax.
- Bounce : 10m Sec Max.

Model No.	Operating force	Life cycles
1109S -1	100±30gf	1,000,000
1109S -2	130±30gf	50,000
1109S -3	160±50gf	100,000
1109S -4	250±50gf	100,000




OUTLINE DRAWING

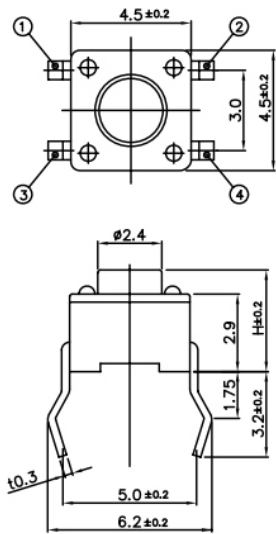


STEM HEIGHT

MODEL	H (mm)
JST1109	3.8
JST1109A	7.0



PACKING
BULKTYPE
1000/1BAG(EA)

CIRCUIT DIAGRAM



P.C.B MOUNTING HOLES

