





JST-1110G

- Rating : DC12V 50mA
- Travel : 0.5±0.2mm
- Contact Resistance : 50mΩMax.
- Bounce : 10m Sec Max.

Model No.	Operating force	Life cycles
1110G -1	130±50gf	80,000
1110G -2	160±50gf	80,000
1110G -4	300±80gf	50,000
1110G -5	500±100gf	50,000

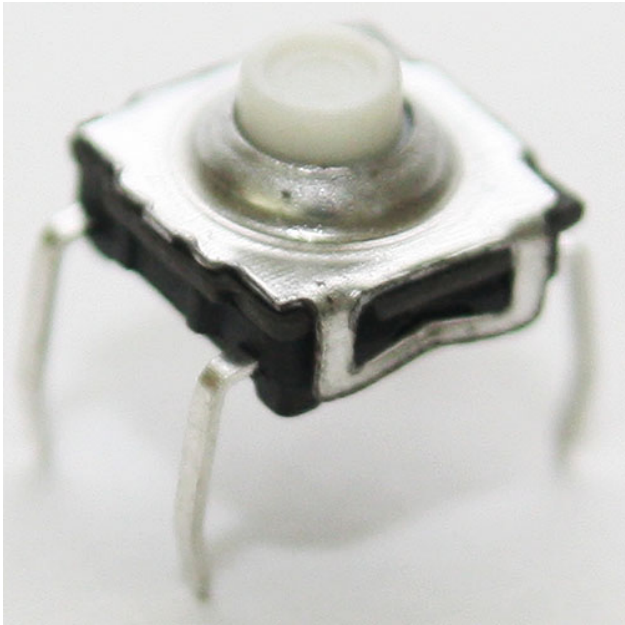


OUTLINE DRAWING

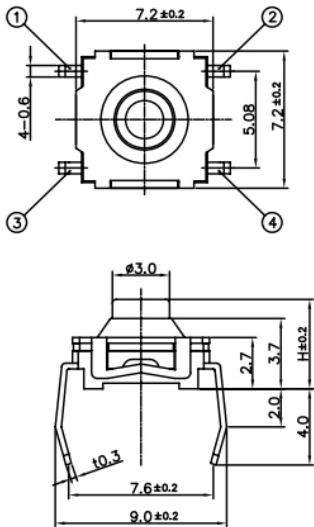


STEM HEIGHT

MODEL	H (mm)
JST1110GA	4.7
JST1110GB	5.2
JST1110GC	6.9
JST1110GD	10



PACKING
BULK TYPE
60/TUBE(EA)

CIRCUIT DIAGRAM



P.C.B MOUNTING HOLES

